

MPI-VSG Electronic Ballast

↑ 14.5mm



Specification


Termination	Spring loaded terminals
Input voltage	8-30VDC or 8-24VAC
Output	15-20mA

Protects the LED from excessive voltage


Constant current source with transient protection

Product Dimensions


Front



Side



Top




All dimensions in mm


Engelking

MPI-VSG Electronic Ballast

Connection diagram for 4-wire systems

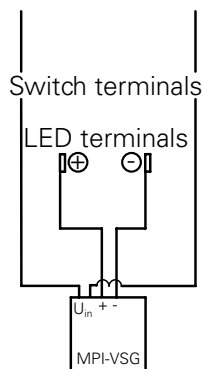

Connection diagram for 2-wire systems

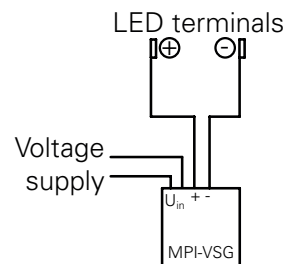

Part Number

MPI-VSG

Engelking

Engelking Elektronik GmbH
Albstr. 16 · D-78609 Tübingen · Germany
Tel. +49 (0)7464-9865-0 · Fax +49 (0)7464-9865-71
info@engelking.de · www.engelking.de